AQUAVISION
television evolved

IR and RS232 Codes

IR CODES	HEX	NEC2 System	NEC2 Coand (Hex)	NEC2 Coand (Dec)	RS232 CODES		RS 232 FUNCTION	REQUIRED RS232 RESPONSE	Long Hex Code
03FCH00	0X07	3	0	0	NMBR	00 07	7	NMBR0007	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH01	0X0A	3	1	1	MUTE	01	MUTE ON	MUTE ON	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH02	0X0B	3	2	2	MUTE	00	MUTE OFF	MUTE OFF	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH03	0X0D	3	3	3	MUTE	99	MUTE TOGLE ON/OFF	MUTE99	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH04	0X25	3	4	4	ENTR	00	ENTER/OK	ENTR00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH05	0X14	3	5	5	ISCT	01	INPUT SCART 1	ISCT01	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH06	0X0F	3	6	6	INFO	00	INFORMATION	INFO00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH07	0X0E	3	7	7			PSM		0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH08	0X12	3	8	8	IDVB	??? ?	INPUT, TV DIGITAL, FOLLOWED BY PRESET NUMBER EG 0001 = 1, 0003 = 3	IDVB FOLLOWED BY NEW 4 DIGIT CHANEL NUMBER EG 0001 = 1, 0003 =3	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH08	0X12	3	8	8	IATS	???	INPUT, ATSC TV FOLLOWED BY PRESET NUMBER EG 0001 = 1, 0003 = 3	IATS FOLLOWED BY NEW 4 DIGIT CHANEL NUMBER EG 0001 = 1, 0003 = 4	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH09	0X14	3	9	9	PAGE	00	PAGE DOWN NOW = "WEST"	PAGE00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH0A	0X15	3	0 A	10			STILL		0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH0B	0X29	3	0 B	11			SLEEP		0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH0C	0X15	3	0 C	12	FAVX	00	FAVOURITE	FAVX00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH0D	0X16	3	0 D	13	TVRD	00	TV/RADIO (PLUS CHANNEL NUMBER)	TVRD00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH0E	0X39	3	0 E	14	YLOW	00	YELLOW	YLOW00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH0F	0X36	3	0 F	15	GREN	00	GREEN	GREN00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH10	0X17	3	1 0	16	PAGE	01	PAGE UP NOW = "EAST"	PAGE01	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7

IR CODES	HEX	NEC2 System Code	NEC2 Coand (Hex)	NEC2 Coand (Dec)	RS232 CODES		RS 232 FUNCTION	RS 232 FUNCTION	Long Hex Code
03FCH11	0X0C	3	11	17	PWRX	99	TOGLE ON/OFF	PWRX99	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH12	0X2C	3	12	18			REVEAL		0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH13	0X18	3	13	19	SRCE	00	SOURCE	SRCE00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH14	0X05	3	14	20	NUMB	0005	5	NMBR0005	0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH15	0X04	3	15	21	NUMB	0004	4	NMBR0004	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH16	0X19	3	16	22	CNCL	00	CANCEL	CNCL00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH17	0X35	3	17	23	INDX	00	INDEX	INDEX	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH18	0X1C	3	18	24	EPGX	00	GUIDE	GUIDE	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH19	0X1D	3	19	25			DTV SET UP		0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH1A	0X22	3	1A	26	PRCH	00	PREVIOUS CHANNEL	PRCH00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH1B	0X09	3	1B	27	NUMB	0009	9	NMBR0009	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH1C	0X02	3	1C	28	NUMB	0002	2	NMBR0002	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH1D	0X01	3	1D	29	NUMB	0001	1	NMBR0001	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH1E	0X00	3	1E	30	NUMB	0000	0	NMBR0000	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH1F	0X08	3	1F	31	NUMB	0008	8	NMBR0008	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH20	0X1A	3	20	32	ICMP	00	COMPOSITE VIDEO INPUT	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH21	0X1B	3	21	33	ISVD	00	S-VIDEO INPUT	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH22	0X23	3	22	34	IHDM	01	HDMI 1 INPUT	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7

HEAD OFFICE AND FACTORY
Aquavision
Unit 7 Riverpark, Billet Lane
Berkhamsted, Hertfordshire
HP4 1HL
United Kingdom
+44 [0]1442 872665

AMERICAN OFFICE
Aquavision, Inc.
#197
5 Southside Drive, Suite 11
Clifton Park, NY 12065
America
+1 800 524 1804

MADE IN BRITAIN

sales@aquavision.tv
sales@aquavision.us

www.aquavsion.tv
www.aquavision.us

Aquavision Distribution Ltd. is a company registered in England and Wales. Registered number: 07756677

IR CODES	HEX	NEC2 System Code	NEC2 Coand (Hex)	NEC2 Coand (Dec)	RS232 CODES		RS 232 FUNCTION	RS 232 FUNCTION	Long Hex Code
03FCH23	0X24	3	23	35	IHDM	02	HDMI 2 INPUT	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH24	0X26	3	24	36	ISCT	02	INPUT SCART 2	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH25	0X27	3	25	37	IRGB	01	INPUT RGB/Y,PB,PR	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH26	0X28	3	26	38	POW R	01	POWER ON	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH27	0X2E	3	27	39	POW R	00	POWER OFF	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH28	0X2F	3	28	40	SUBP	00	SUBPAGE	SUBP00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH29	0X30	3	29	41	IUSB	01	USB 1 INPUT	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH2A	0X31	3	2A	42	IUSB	02	USB 2 INPUT	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH2B	0X33	3	2B	43	IUSB	03	USB 3 INPUT	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH2C	0X34	3	2C	44	ISAT	???	INPUT, SATELLITE, FOLLOWED BY PRESET NUMBER EG 01 = 1, 03 = 3	ISAT FOLLOWED BY NEW 4 DIGIT CHANEL NUMBER EG 0001 = 1, 0003 =3	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH2D	0X37	3	2D	45	IHDM	03	HDMI 3 INPUT (Connec-TV on MSD309BT)	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH2E	0X3A	3	2E	46	ILAN	00	ETHERNET INPUT	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH2F	0X5D	3	2F	47	ASPC	01	WIDE	ASPC01	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH30	0X5E	3	30	48	ASPC	02	PANORAMA	ASPC02	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH31	0X5F	3	31	49	ASPC	03	04:03	ASPC03	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH32	0X60	3	32	50	ASPC	04	ZOOM	ASPC04	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH33	0X61	3	33	51	ASPC	05	AUTO	ASPC05	0000 006C 000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH34	0X62	3	34	52	LANGUAGE				0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 05F7

HEAD OFFICE AND FACTORY
Aquavision
Unit 7 Riverpark, Billet Lane
Berkhamsted, Hertfordshire
HP4 1HL
United Kingdom
+44 [0]1442 872665

AMERICAN OFFICE
Aquavision, Inc.
#107
5 Southside Drive, Suite
Clifton Park, NY 12065
America
+1 800 524 1804

MADE IN BRITAIN

sales@aquavision.tv
sales@aquavision.us
www.aquavsion.tv
www.aquavision.us

Aquavision Distribution Ltd. is a company registered in England and Wales. Registered number: 07756677

IR CODES	HEX	NEC2 Sustem Code	NEC2 Coand (Hex)	NEC2 Coand (Dec)	RS232 CODES		RS 232 FUNCTION	RS 232 FUNCTION	Long Hex Code
03FCH35	0X3E	3	35	53	PLPS	00	PLAY/PAUSE	PLP200	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH36	0X3F	3	36	54	STOP	00	STOP	STOP00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH37	0X40	3	37	55	RECX	00	REP/•	RECX00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH38	0X41	3	48	56	TSFT	00	T.SHIFT	TTSFT00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH39	0X42	3	49	57	TRAK	00	TRACK BACK ltt	TRAK00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH3A	0X43	3	3A	58	TRAK	01	TRACK FORWARDuul	TRAK01	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH3B	0X44	3	3B	59	FAST	00	BACK tt	FAST00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH3C	0X45	3	3C	60	FAST	01	FORWARD uu	FAST01	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH3D	0X46	3	3D	61	EAST	00	EAST	EAST00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH3E	0X47	3	3E	62	WEST	00	WEST	WEST00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH3F	0X48	3	3F	63	NRTH	00	NORTH	NORTH00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH40	0X49	3	40	64	PIPP	00	PIP PR-	PIP PR-	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH41	0X4A	3	41	65	PIPP	01	PIP PR +	PIP PR +	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH42	0X4B	3	42	66	SUTH	00	SOUTH	SUTH00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH43	0X4C	3	43	67	MENU	00	MENU	MENU00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH44	0X2A	3	44	68			TIME		0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH45	0X06	3	45	69	NUMB	00 06	6	NMBR0006	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH46	0X03	3	46	70	NUMB	00 03	3	NMBR0003	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7
03FCH47	0X20	3	47	71	UPXX	00	INCREASES CHANNEL BY 1 AND OTHER FUNCTIONS	UPXX00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0041 0016 0041 0016 05F7

AQUAVISION®
television solutions

IR CODES	HEX	NEC2 Sustem Code	NEC2 Coand (Hex)	NEC2 Coand (Dec)	RS232 CODES		RS 232 FUNCTION	RS 232 FUNCTION	Long Hex Code
03FCH48	0X4D	3	48	72			P-POSITION		0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH49	0X4E	3	49	73	SIZE	00	PVR LIST/USB	SIZE00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH4A	0X32	3	4A	74	SSMX	00	SSM	SSM	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH4B	0X21	3	4B	75	DOW N	00	DECREASE CHANNEL BY 1 AND OTHER FUNCTIONS	DOWN00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH4C	0X4F	3	4C	76			-/--	-/--	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0016 0016 0016 0016 0041 0016 05F7
03FCH4D	0X1E	3	4D	77	ARCX	00	ARC	ARC00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH4E	0X50	3	4E	78	CLST	00	CH LIST	CLST00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH4F	0X51	3	4F	79	ITVA	???	INPUT, TV ANALOGUE, FOLLOWED BY PRESET NUMBER EG 01 = 1, 03 = 3	ITVA, FOLLOWED BY NEW 4 DIGIT PRESET NUMBER EG 0001 = 1, 0003 = 3	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH50	0X52	3	50	80	EXIT	00	EXIT	EXIT00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH51	0X38	3	51	81	CYAN	00	CYAN/BLUE	CYAN00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH52	0X3C	3	52	82	TEXT	00	TEXT ON	TEXT00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH53	0X10	3	53	83	RGHT	00	INCREASE VOLUME BY 1 AND OTHER FUNCTIONS " NOW NORTH"	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH54	0X53	3	54	84			SWAP		0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH55	0X3B	3	55	85	REDX	00	RED	REDX00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH56	0X54	3	56	86			CHANGE SOUND FORMAT		0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH57	0X11	3	57	87	LEFT	00	DECREASE VOLUME BY 1 AND OTHER FUNCTIONS "NOW SOUTH"	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH58	0X1F	3	58	88	IAPC	00	ANALOGUE PC INPUT	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH5 9	0X55	3	59	89			MIX		0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7

AQUAVISION®
television evolved

IR CODES	HEX	NEC2 Sustem	NEC2 Coand (Hex)	NEC2 Coand (Dec)	RS232 CODES		RS 232 FUNCTION	RS 232 FUNCTION	Long Hex Code
03FCH5A	0X56	3	5A	90	ASPC	07	AUTO WIDE	ASPC07	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH5B	0X57	3	5B	91			HOLD		0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH5C	0X58	3	5C	92	SLCT	00	SELECT	SLCT00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH5D	0X59	3	5D	93	STOR	00	STORE	STOR00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH5E	0X5A	3	5E	94			P-INPUT	P-INPUT	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH5F	0X5B	3	5F	95	FLOF	00	FLOF/LIST	FLOF00	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 0016 0016 0041 0016 05F7
03FCH60	0X5C	3	60	96	TEXT	00	TEXT/MIX/OFF	TEXT/MIX/OFF	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH61	0X62	3	61	97	ASPC	06	14:09	ASPC06	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F761
03FCH62	0X63	3	62	98	VOLM	25	VOLUME NUMBER 25	VOLM25	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH63	0X64	3	63	99	VOLM	50	VOLUME NUMBER 50	VOLM50	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH64	0X65	3	64	100	VOLM	75	VOLUME NUMBER 75	VOLM75	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH65	0X66	3	65	101	COND	01	"READY" STATE	COND01	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH66	0X67	3	66	102	IAUD	04	Audio Input	SUCCESS or FAIL	0000 006C 0000 0022 015B 00AD 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0016 0016 0016 0016 0016 0016 0016 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 0041 0016 05F7
03FCH67					VOLM	??	QUERY VOLUME STATE – RESPONSE IS VOLM, THEN VOLUME NUMBER	VOLMXX	
03FCH68					IVOL	XX	INITIAL VOL SETTING	IVOLXX	
03FCH69					IVOL	??	QUERY INITIAL VOL ON POWER UP. RESPONSE IS VOLM THEN INITIAL VOL SETTING	IVOLXX	
03FCH70					MVOL	XX	MAX VOLUME SETTING	MVOLXX	
03FCH71					MVOL	??	ABOVE BUT TO SET MAXIMUM VOLUME	MVOLXX	
03FCH72					ICHN	??? ?	ABOVE BUT TO SET INITIAL CH	ICHNXXXX	
03FCH73					POWR	??	QRY POWER STATE	POWRXX	
03FCH74					VOLM	XX	VARIABLE VOLUME INPUT FROM 01-99	VOLMXX	
03FCH75					STAT	??	status of power, mute, volume, input. Each with a carriage return after it		
03FCH76					MUTE	??	MUTE QUERY	MUTEXX	

AQUAVISION
television evolved

RS232 Connection Details

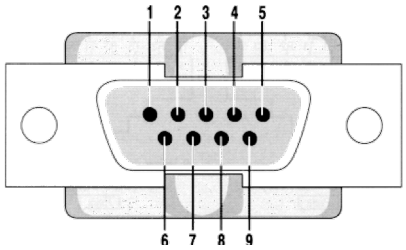

The RS232 connector on the back of your LCD is a 9 pin “D”

Note: Due to transmission being bi-directional, a 25ms pause should be left between each command to allow for the “success” or “fail” command to be read.

DB9	FUNCTION
1	
2	Receive Data
3	Transmit Data
4	
5	Signal Ground
6	
7	
8	
9	

Baud Rate EU:	115200bps
Baud Rate US:	38400
Data Length:	8bits
Parity bit:	None
Stop bit:	1 bit
Flow Control:	None

IR DETAILS		
PARAMETER	TYPICAL	RANGE
0	1.12MS	1.0-1.23MS
1	2.25MS	2.0-2.4MS
LEADER	9.0MS	8.0-10.0MS
WORD DISTANCE	108MS	
IR DETAILS		
PARAMETER	TYPICAL	RANGE
0	1.12MS	1.0-1.23MS
1	2.25MS	2.0-2.4MS
LEADER	9.0MS	8.0-10.0MS
WORD DISTANCE	108MS	

HEAD OFFICE AND FACTORY
Aquavision
Unit 7 Riverpark, Billet Lane
Berkhamsted, Hertfordshire
HP4 1HL
United Kingdom
+44 [0]1442 872665

AMERICAN OFFICE
Aquavision, Inc.
#197
5 Southside Drive, Suite 11
Clifton Park, NY 12065
America
+1 800 524 1804

MADE IN BRITAIN

sales@aquavision.tv
sales@aquavision.us

www.aquavsion.tv
www.aquavision.us

Aquavision Distribution Ltd. is a company registered in England and Wales. Registered number: 07756677