


DB Range Assembly Instructions



Assembly Details

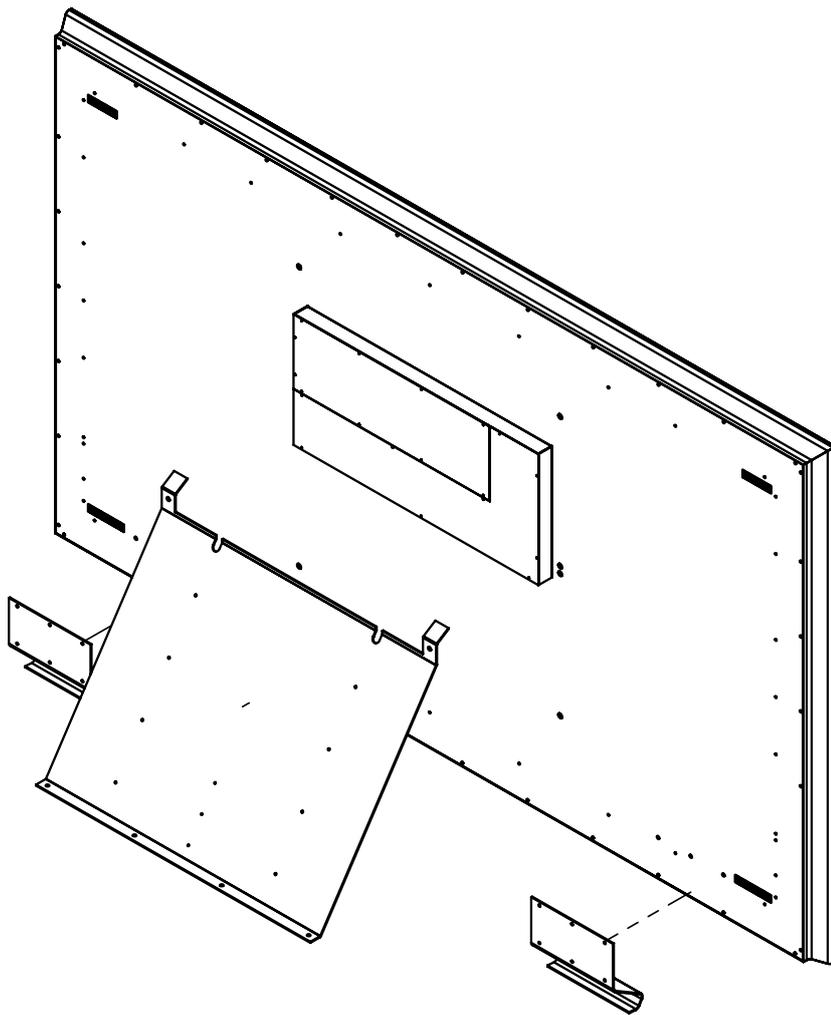

WARNING

HEAVY OBJECT

To avoid muscle strain or back injury, use lifting aids & proper lifting techniques when handling this product



Aquavision recommend you will need a minimum of


4 persons

to assemble this unit safely.




Danger
Electrocution risk


1x DB100 Television

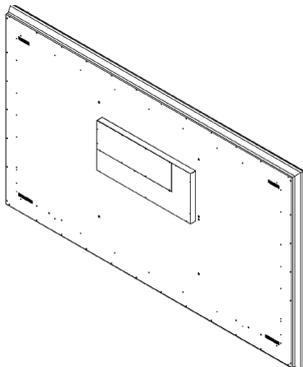


1x Rear Support Leg (optional)

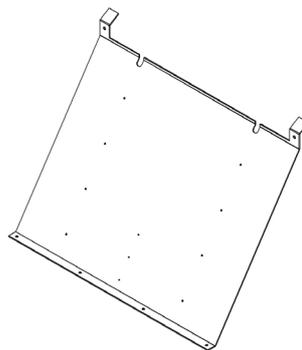


2x Front Feet (optional)



2x Heavy Lifting Straps



2x Safety Cables (optional)



6x M5 Hex Bolts (optional)



1x IEC Power Lead



STEP 1

Unscrew all 4 diagonal strengthening supports and the 2 long sides of the box while someone is holding the TV upright.

STEP 2

Unscrew the top panel and remove the upper protective foams from the top of the TV.

STEP 3


Unbox the handling straps provided and place under the TV. Lift gently while still holding the TV upright.

STEP 4

Insert the upper protective foams between the TV and the lower foams to raise the television up. Ensure the profile cut out matches the TV frame.


STEP 5

Lower the protective cover from the top of the screen to reveal the front feet mounting positions.

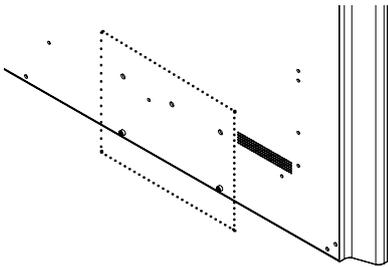


STEP 6

Remove the 2x hex bolts (per foot) from the back of the television. You will need a 2.5mm Allan Key.

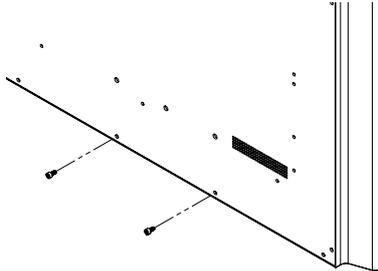


STEP 7

Install the feet using the 6x hex bolts provided and 4x bolts from the back of the TV. You will need a 2.5mm Allan Key.

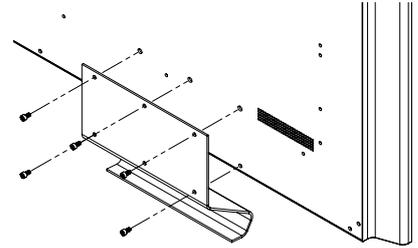


STEP 8

Unscrew the remaining wooden side panels while ensuring the TV is secure.

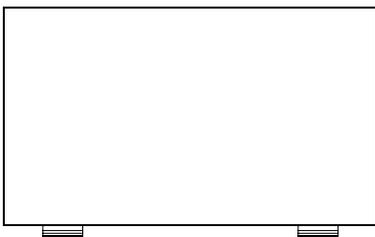

STEP 9

Gently lift TV out using straps and place on the floor while still being held upright.

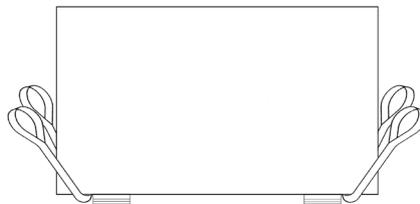


STEP 10

Fit the rear support stand to its mating clevis pin on the back of the TV and rotate clip to attach over the clevis.




STEP 11

Hook the wire straps to the rear support leg and then to the small mating clevis pins on the bottom of the TV.



STEP 12

Remove the black thumb nuts from the 'L' shaped panel.

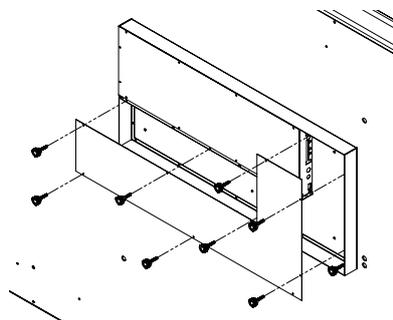

STEP 13

Insert cables up from behind the rear support leg into the connector area and insert all connections as required. Replace 'L' shaped cover panel when finished and screw in the black thumb nuts to secure.



For more information please refer to the DB Operating Instructions booklet inside the box. This television is only to be installed by qualified personnel.



www.aquavision.tv

UK Head Office and Factory: Aquavision, Grosvenor Business Park, Horsfield Way, Stockport, Cheshire, SK6 2SU

Enquiries: sales@aquavision.tv

Telephone: +44(0)161 711 1900

The specifications shown were accurate at time of going to press. AQUAVISION'S® policy of continuous development means some changes may take place. Please check with the office for confirmation. All screen pictures simulated. All logo's and trade marks acknowledged. E. & O.E. v2