



Hotel Mode for Genesis & Nexus Televisions


Hotel Mode allows you to set features including:

- Initial Volume
- Maximum Volume
- Initial Channel
- Initial Picture Status Memory (PSM)
- Initial Sound Status Memory (SSM)

The table below shows you the button sequences you will need to access the necessary menus on your television.

Screen Version	Factory Settings Location
Series 4 A	Set Volume to 0 then press 9876
Series 4 B	Press INFO, STILL, SLEEP, MUTE and then ENTER
Genesis	Set Volume to 0 then press 9876
Genesis 2	Press SOURCE then press 2580
Nexus	
Pinnacle (Pre 2018 - Android 4)	
Pinnacle (Post 2018 - Android 6)	Press SOURCE then press 1147
Elite 4K	Press MENU then either 1147 or 0852 or 4588
Genesis ATSC	Press SOURCE then press 2223
Nexus ATSC	
Pinnacle ATSC	


1. Using the table above, follow the instructions to access the Factory Settings Menu. Scroll down to FUNCTION and press the RIGHT arrow.

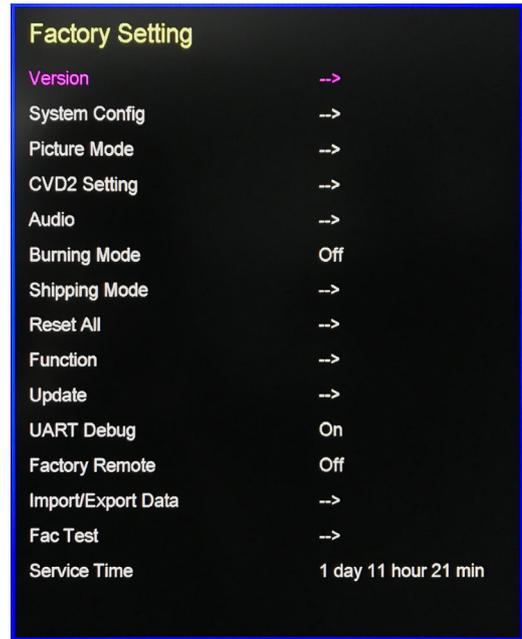

A screenshot of a television's 'Factory Setting' menu. The menu is displayed on a black background with yellow text. The title 'Factory Setting' is at the top. Below it is a list of settings, each followed by a right-pointing arrow or a value. The 'Version' item is highlighted in pink.

Setting	Value/Action
Version	-->
System Config	-->
Picture Mode	-->
CVD2 Setting	-->
Audio	-->
Burning Mode	Off
Shipping Mode	-->
Reset All	-->
Function	-->
Update	-->
UART Debug	On
Factory Remote	Off
Import/Export Data	-->
Fac Test	-->
Service Time	1 day 11 hour 21 min


2. Scroll down to 'Hotel Mode' and press the RIGHT key to change the option from OFF to ON. Press EXIT to return to the main screen.

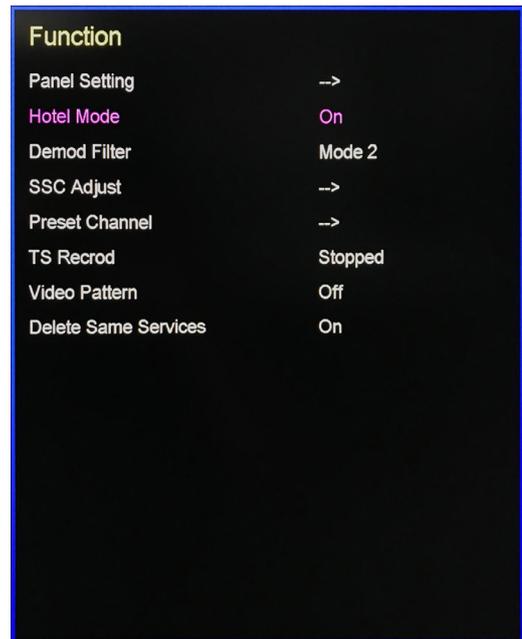

A screenshot of a television's 'Function' menu. The menu is displayed on a black background with yellow text. The title 'Function' is at the top. Below it is a list of settings, each followed by a right-pointing arrow or a value. The 'Hotel Mode' item is highlighted in pink.

Setting	Value/Action
Panel Setting	-->
Hotel Mode	On
Demod Filter	Mode 2
SSC Adjust	-->
Preset Channel	-->
TS Recrod	Stopped
Video Pattern	Off
Delete Same Services	On


3. Press MENU on your remote control and scroll down to 'Feature'

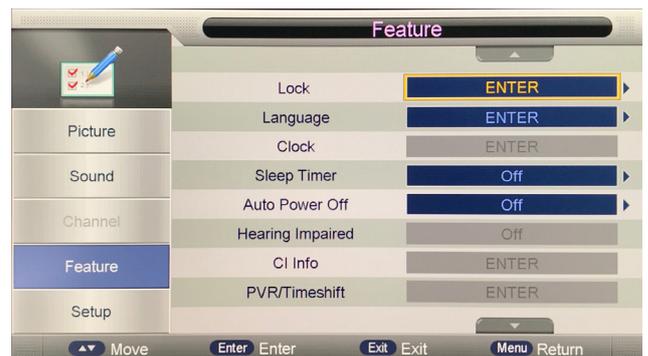


A screenshot of a television's 'Feature' menu. The menu is displayed on a light-colored background. The title 'Feature' is at the top. Below it is a list of settings, each followed by a right-pointing arrow and a button label. The 'Feature' item is highlighted in blue.

Setting	Value/Action
Lock	ENTER
Language	ENTER
Clock	ENTER
Sleep Timer	Off
Auto Power Off	Off
Hearing Impaired	Off
CI Info	ENTER
PVR/Timeshift	ENTER

4. Go to 'Lock' and then press the RIGHT arrow. The password is 0000.

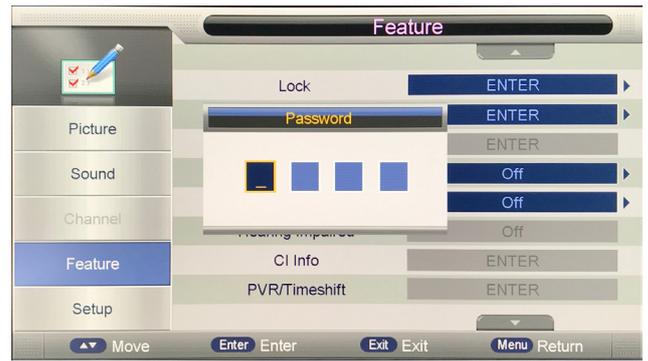

5. Press the DOWN arrow until you reach 'Hotel Mode' on the same menu and press the RIGHT arrow to enter.

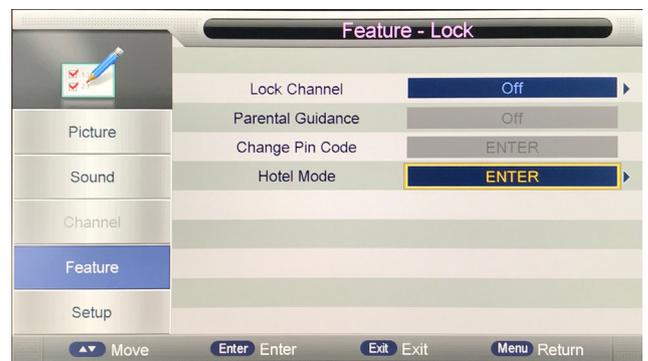


6. You will now be able to change any required settings.

Function	
Panel Setting	-->
Hotel Mode	On
Demod Filter	Mode 2
SSC Adjust	-->
Preset Channel	-->
TS Recrod	Stopped
Video Pattern	Off
Delete Same Services	On

Exporting the Hotel Data Base

To export the Hotel Database, make sure a USB stick is inserted in the back of the television and in Hotel Mode, press the DOWN arrow until you reach 'Next Page' and then press ENTER. Scroll to 'DataBase Export' and press ENTER.


Eject the USB device from the television and insert it into a computer. You will see a folder named 'CV_512'. In this folder there will be a file named 'FlashData_S2T502_1.bin'.

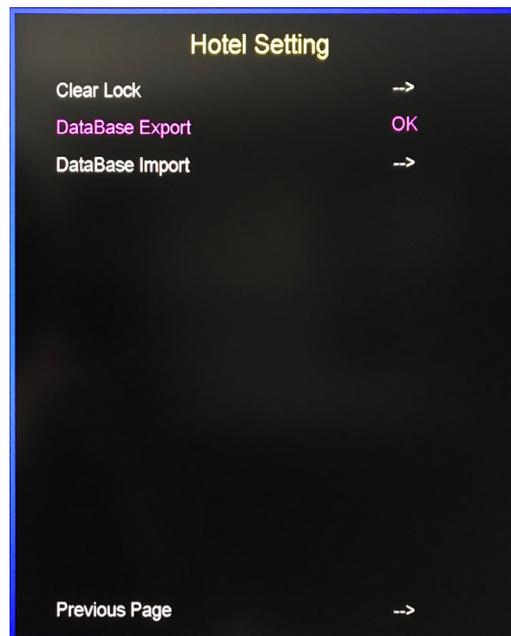

Importing the Hotel Data Base

To import the Hotel Database, insert the USB drive into the back of the television. Repeat the steps from earlier in the data sheet to get back into the 'Hotel Setting' menu. Scroll to 'DataBase Import' and press the RIGHT arrow.

You will then be able to select the Data Base you want to import using the RIGHT key. The TV will then restart.

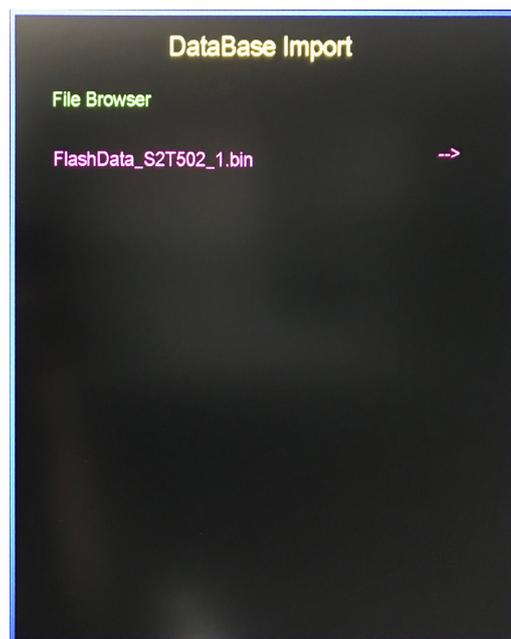

HEAD OFFICE AND FACTORY
Aquavision
Grosvenor Business Park, Horsfield Way,
Stockport, Cheshire, SK6 2SU
United Kingdom

 www.aquavision.tv
 sales@aquavision.tv
 +44 [0]161 711 1900

